



REACH compliant



Conflict mineral free




Lithium Cylindrical Cell - CR 14250 1/2AA

- Low self-discharge
- Long shelf life
- UN 38.3 tested
- Wide assortment of mounting options and wire terminals available

SPECIFICATIONS	
Jauch part number	248790
Nominal Voltage	3V
Nominal Capacity	850 mAh
Cut-Off Voltage	2V
Continuous Standard Load	10 mA
Max. Continuous Current	800 mA
Max. Pulse Current	1500 mA
Operating Temperature	-40°C to +70°C *
Weight	Approx. 9 g
Chemistry	Li/MnO ₂
UL1642	MH62838

Note: Capacity 850mAh is obtained at standard cc load to 2.0V at 23°C.

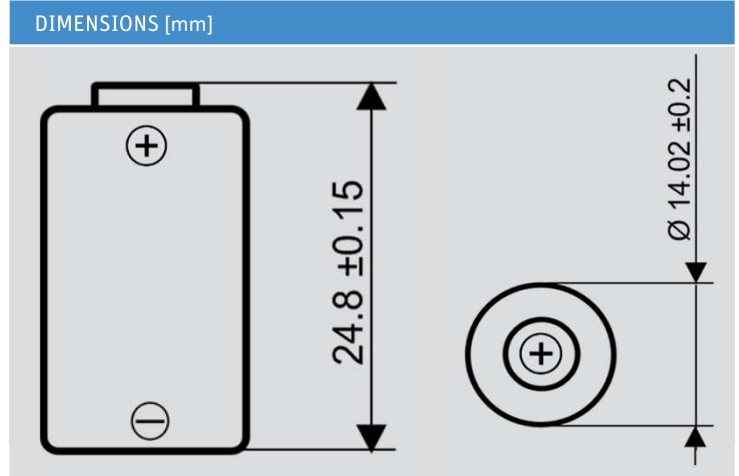

* In applications where the battery is exposed to temperatures >60°C, please contact Jauch.

